

### Datasheet

# Homewizard WiFi Meters



The HomeWizard WiFi Meters are some of the first MID approved Din Rail mounted WiFi meters. These meters, available in single or 3 phase, fit straight into your existing box to give you up to date insights into the usage of your solar, heat pump, electric car and much much more.

### HomeWizard Single Phase WiFi Meter


- Din Rail Mounted
- 100 Amp
- Energy Efficient <2W usage
- MID Approved



<b>Weight</b>	190g
<b>Connection</b>	802.11b/g/n (2.4GHz) WiFi WPA2 and WPA3 encrypted
<b>History Storage</b>	Up to 12 Months Sign up to Energy+ to extend this
<b>Security</b>	Automatic security updates 128bits AES encryption with TLS/SSL
<b>External Connections</b>	Open API
<b>Voltage</b>	176—276V AC
<b>Max Load</b>	100 Amp
<b>Power Usage</b>	<2W
<b>Accuracy Class</b>	B (MID)
<b>Mounting</b>	35mm DIN-rail
<b>Dimensions</b>	36 X 100 X 63mm
<b>Display</b>	LED LCD Display

### HomeWizard Single Phase WiFi Meter

- Din Rail Mounted
- 100 Amp
- Energy Efficient <2W usage
- MID Approved

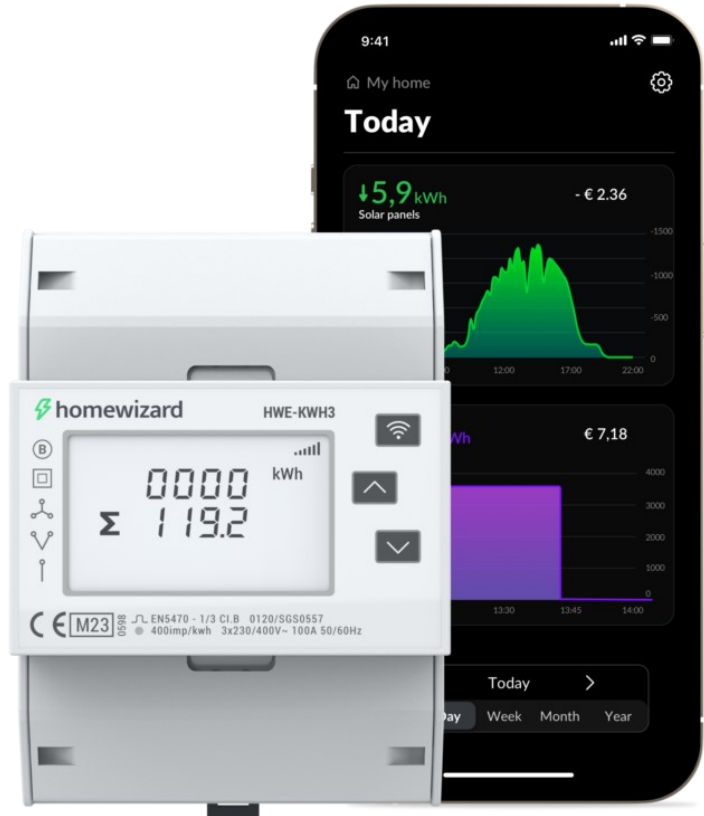

<b>Weight</b>	490g
<b>Connection</b>	802.11b/g/n (2.4GHz) WiFi WPA2 and WPA3 encrypted
<b>History Storage</b>	Up to 12 Months Sign up to Energy+ to extend this
<b>Security</b>	Automatic security updates 128bits AES encryption with TLS/SSL
<b>External Connections</b>	Open API
<b>Voltage</b>	176—276V AC
<b>Max Load</b>	100 Amp
<b>Power Usage</b>	<2W
<b>Accuracy Class</b>	B (MID)
<b>Mounting</b>	35mm DIN-rail
<b>Dimensions</b>	72 X 100 X 66mm
<b>Display</b>	LED LCD Display